

## RVI-WL-34535B Product Bulletin

## REPLACEMENT VACUUM INTERRUPTER


**Specifications and Ratings** 

Breaker Type	Rated	Max	Impulse	Rated Short Circuit
	Current	Voltage	Withstand	Amps
	(A rms)	(kV rms)	(kV peak)	(kA)
VCP-W	1200	15	95	18

## **Standard Features and Options**

- IMPULSE TESTED TO ANSI C37
- AC WITHSTAND TEST TO ANSI C37
- EXCELLENT HIGH VOLTAGE INSULATION
- HIGH CUMULATIVE AND HIGH BREAKING CAPACITY
- ULTRA-SMALL AND LIGHT-WEIGHT
- HIGH RELIABILITY DUE TO STRINGENT TESTING
- FINE-ALUMINA CERAMIC FOR EXCELLENT VACUUM SEAL
- Cu-Cr CONTACT FOR EXCELLENT HIGH VOLTAGE CONDUCTIVITY AND BREAKING PERFORMANCE
- EXCLUSIVE INTERNAL TORSION CONTROL
- FULL 1-YEAR WARRANTY

**Typical Dimensions** 

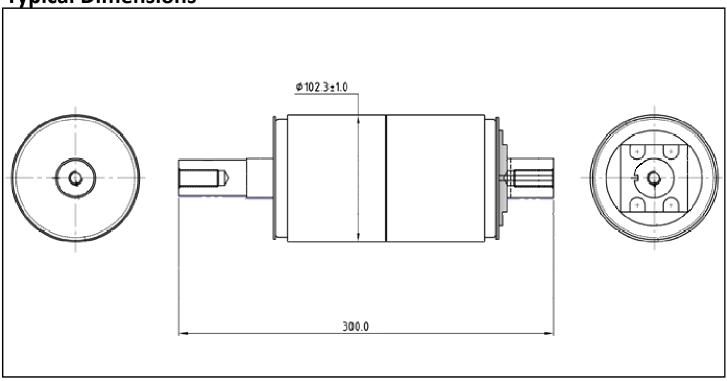

©2012 Vacuum Interrupters, Inc. 3414 Midcourt Rd. #112 Carrollton, TX 75006 Phone: 940-382-3300 Fax: 214-442-5884